

hergom


C-16/80

WOOD INSERT



FEATURES

- Cast iron structure and firebox
- Convection blower with speed control
- Air intake control
- Double combustion technology
- Outside air intake
- Ash pan
- Convection jacket with hot air channeling outlets
- Finish: Matte Black

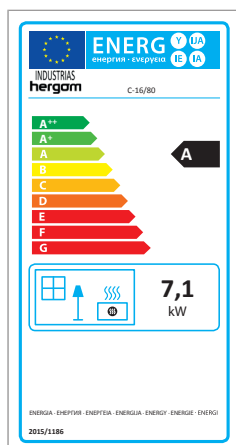


TECHNICAL SPECIFICATIONS

GENERAL DATA

Energy Efficiency Index - Ecolabel	A
EC Certification	RRF 29 20 5590
Norm	EN 13229
Heat Output - Min.-Max (kW)	3-14
Heat Output - Nominal (kW)	7
Efficiency (%)	72%
CO Emissions (13% O2 Vol. %)	0,11
Maximum Log Length (mm)	500
Weight (kg)	140

INSTALLATION

Flue Exit	Top
Ø Flue Exit (mm)	180
Ø Heat Channeling Outlets (mm)	120
Recommended Chimney Height (m)	5-6
Minimum Draft (Pa)	12
Average Smoke Temperature (°C)	348

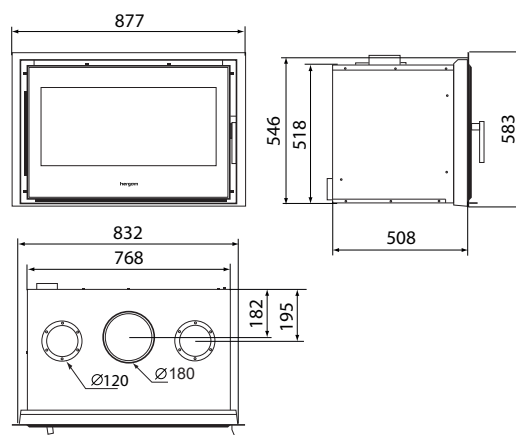

hergom.com